

Hyper Black PPF Sample

Technical Specifications of Bremen Hyper Black PPF

FILM FEATURES:

- Total thickness (film + adhesive)(μm):
- Tensile strength (N/25 mm):
- Elongation at break (%):
- Shrinkage 168 hours at 70 °C (158 °F) (mm):

Indicative value

181 \pm 10 %

Average values

> 111

> 360

< 0.2

LINER : Silicone-coated PET liner

ADHESIVE:

- Solvent-based acrylic adhesive.
- Immediate and permanent adhesion, optimal after 24 hours of contact.

ADHESIVE PROPERTIES:

(Measured average values at publication of the technical data sheet)

- Peel strength test 180° (N/25mm):
- after 20 minutes of application:
- after 24 hours of application:

Average values

22


24

- Initial tack (N/25 mm):

12

- Release (N/25 mm):

0.2

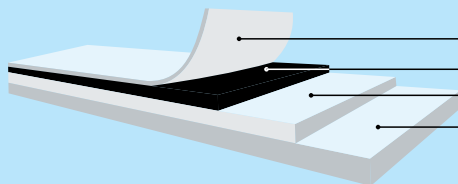

Self Healing Top Clear Coat
Deep Black Dried ThermoPolyUrethane
Acrylic Adhesive
PET Release Liner